



INSPECTION KIT


Primo & Symo GEN24 Plus



The Inspection Kit GEN24 Plus allows PV systems to be inspected easily and safely.

Instead of the cabling to the inverter terminals having to be disconnected, with this kit all the technician has to do is unplug the connectors together with the cables and plug them into the supplied counterparts. Measurements can thereby be conducted easily, quickly, and safely. The kit is compatible with all standard types of conductor and may be used with or without ferrules.

TECHNICAL DATA	INSPECTION KIT PRIMO GEN24 PLUS	INSPECTION KIT SYMO GEN24 PLUS
Pack contents	1x 4-pin and 2x 5-pin push-in spring-type terminal	2x 4-pin and 1x 5-pin push-in spring-type terminal
Rated voltage		1000 V
Rated current		41 A
Connection cross section		0.5 -10 mm ²
Temperature range		-60 - +105 °C
Dimensions, 5-pin connector (WxHxD)		41 mm x 25 mm x 49,2 mm
Weight, 5-pin connector		31.8 g
Dimensions, 4-pin connector (WxHxD)		33.4 mm x 25 mm x 49.2 mm
Weight, 4-pin connector		25.8 g

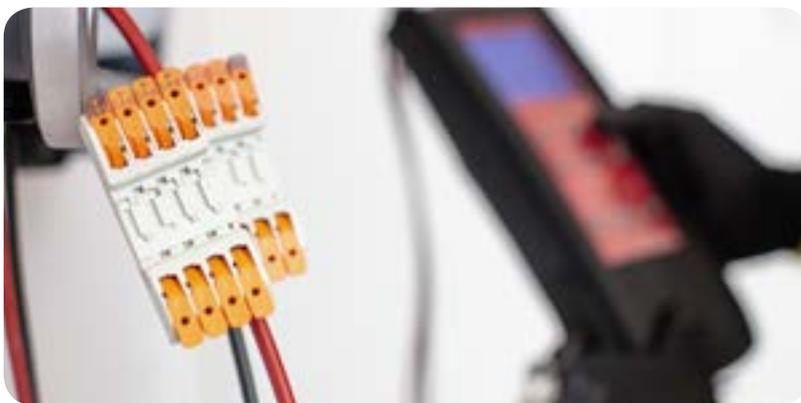

Fronius Australia Pty Ltd.
90-92 Lambeck Drive
Tullamarine VIC 3043
Australia
pv-sales-australia@fronius.com
www.fronius.com.au

Fronius UK Limited
Maidstone Road, Kingston
Milton Keynes, MK10 0BD
United Kingdom
pv-sales-uk@fronius.com
www.fronius.co.uk

Fronius International GmbH
Froniusplatz 1
4600 Wels
Austria
pv-sales@fronius.com
www.fronius.com